



单排滚子链 Simplex roller chains

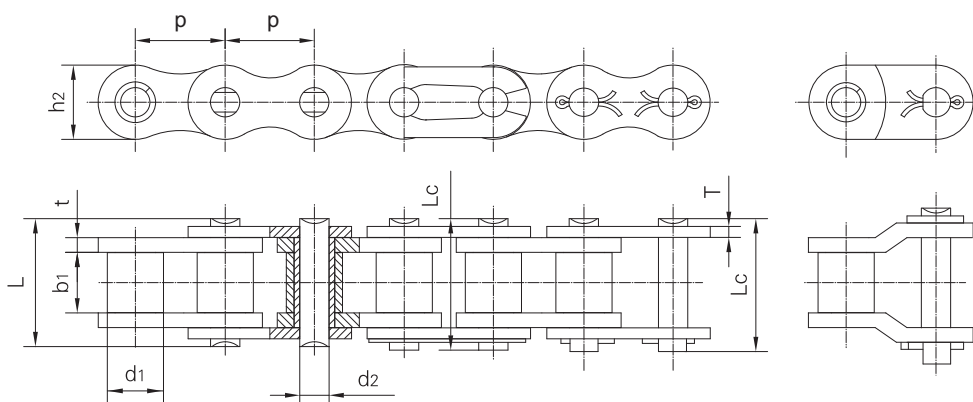

链号 Chain No.		节距 Pitch	滚子 直径 Roller diameter	内节 内宽 Width between inner	销轴 直径 Pin diameter	销轴 长度 Width over bearing	连接销 轴长度 Width over connecting	内链板 高度 Inner plates depth	链板 厚度 Plate thickness	抗拉 强度 Ultimate tensile strength	平均抗 拉强度 Average tensile strength	动载 载荷 Dynamic strength	每米 重量 Mass per meter
GB ISO DIN	BS	p	d1 max	plates b1 min	d2 max	pins L max	pins Lc max	h2 max	t/T	Fu min	Fua	Fd min	q ≈
		mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	N	kg/m
05B-1	05B-1	8.00	5.00	3.00	2.31	8.60	11.7	7.11	0.80	4.4	5.6	820	0.18
*06B-1	*06B-1	9.525	6.35	5.72	3.28	13.50	16.8	8.26	1.30	8.9	9.9	1290	0.41
08B-1	08B-1	12.70	8.51	7.75	4.45	17.00	20.9	11.81	1.60	17.8	18.4	2480	0.70
10B-1	10B-1	15.875	10.16	9.65	5.08	19.60	23.7	14.73	1.70	22.2	26.1	3330	0.95
12B-1	12B-1	19.05	12.07	11.68	5.72	22.70	27.3	16.13	1.85	28.9	30.6	3720	1.25
16B-1	16B-1	25.40	15.88	17.02	8.28	36.10	41.5	21.08	4.15/3.1	60.0	69.2	9530	2.70
20B-1	20B-1	31.75	19.05	19.56	10.19	43.20	49.3	26.42	4.5/3.5	95.0	101.0	13500	3.60
24B-1	24B-1	38.10	25.40	25.40	14.63	53.40	60.0	33.40	6.0/4.8	160.0	169.0	19700	6.70
28B-1	28B-1	44.45	27.94	30.99	15.90	65.10	72.5	37.08	7.5/6.0	200.0	211.0	27100	8.30
32B-1	32B-1	50.80	29.21	30.99	17.81	67.40	75.3	42.29	7.0/6.0	250.0	263.0	29900	10.50
40B-1	40B-1	63.50	39.37	38.10	22.89	82.60	92.8	52.96	8.5/8.0	355.0	374.0	41800	16.00
48B-1	48B-1	76.20	48.26	45.72	29.24	99.10	109.6	63.88	12.0/10.0	560.0	590.0	63600	25.00

*直链板 Straight side plates

双排滚子链 Doubling roller chains

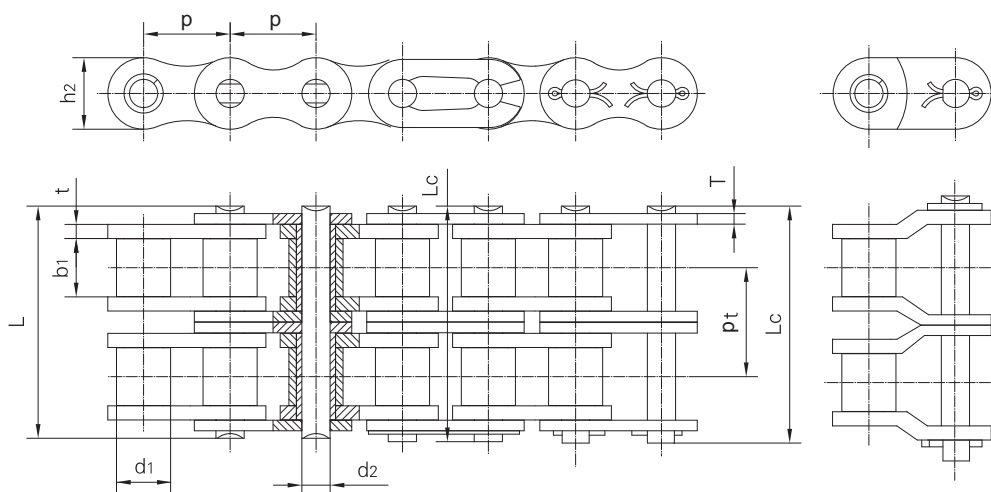


链号 Chain No.		节距 Pitch	滚子 直径 Roller diameter	内节 内宽 Width between inner	销轴 直径 Pin diameter	销轴 长度 Width over bearing	连接销 轴长度 Width over connecting	内链板 高度 Inner plates depth	排距 Transverse pitch	链板 厚度 Plate thickness	抗拉 强度 Ultimate tensile strength	平均抗 拉强度 Average tensile strength	每米 重量 Mass per meter
GB ISO DIN	BS	p	d1 max	plates b1 min	d2 max	pins L max	pins Lc max	h2 max	pt	t/T	Fu min	Fua	q ≈
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
05B-2	05B-2	8.00	5.00	3.00	2.31	14.3	17.4	7.11	5.64	0.80	7.8	9.7	0.36
*06B-2	*06B-2	9.525	6.35	5.72	3.28	23.8	27.1	8.26	10.24	1.30	16.9	17.8	0.78
08B-2	08B-2	12.70	8.51	7.75	4.45	31.0	34.9	11.81	13.92	1.60	31.1	36.8	1.35
10B-2	10B-2	15.875	10.16	9.65	5.08	36.2	40.3	14.73	16.59	1.70	44.5	53.4	1.80
12B-2	12B-2	19.05	12.07	11.68	5.72	42.2	46.8	16.13	19.46	1.85	57.8	62.8	2.50
16B-2	16B-2	25.40	15.88	17.02	8.28	68.0	73.4	21.08	31.88	4.15/3.1	106.0	126.0	5.40
20B-2	20B-2	31.75	19.05	19.56	10.19	79.7	85.8	26.42	36.45	4.5/3.5	170.0	200.0	7.20
24B-2	24B-2	38.10	25.40	25.40	14.63	101.8	108.4	33.40	48.36	6.0/4.8	280.0	303.0	13.50
28B-2	28B-2	44.45	27.94	30.99	15.90	124.7	132.1	37.08	59.56	7.5/6.0	360.0	386.0	16.60
32B-2	32B-2	50.80	29.21	30.99	17.81	126.0	133.0	42.29	58.55	7.0/6.0	450.0	483.0	21.00
40B-2	40B-2	63.50	39.37	38.10	22.89	154.9	165.1	52.96	72.29	8.5/8.0	630.0	676.0	32.00
48B-2	48B-2	76.20	48.26	45.72	29.24	190.4	200.9	63.88	91.21	12.0/10.0	1000.0	1073.0	50.00

*直链板 Straight side plates

三排滚子链

Triplex roller chains

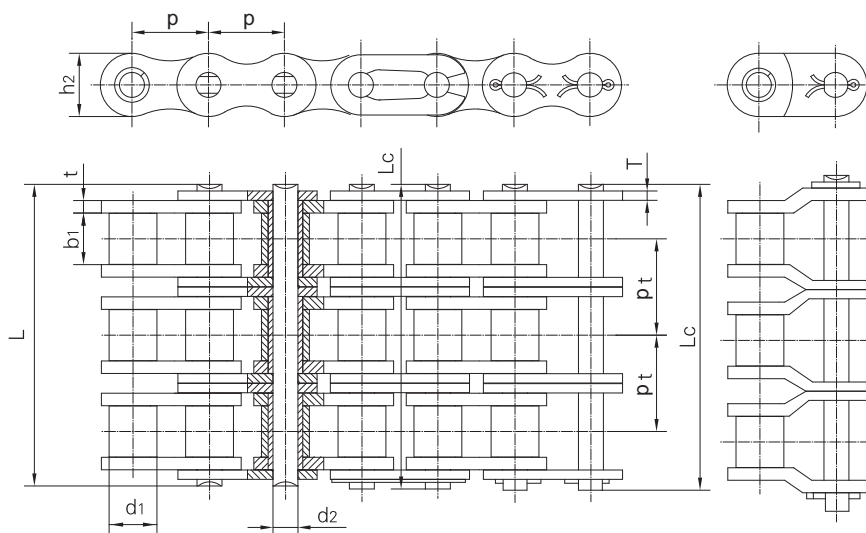

链号 Chain No.		节距 Pitch	滚子 直径 Roller diameter	内节 内宽 Width between inner	销轴 直径 Pin diameter	销轴 长度 Width over bearing	连接销 轴长度 Width over connecting	内链板 高度 Inner plates depth	排距 Transverse pitch	链板 厚度 Plate thickness	抗拉 强度 Ultimate tensile strength	平均抗拉 强度 Average tensile strength	每米 重量 Mass per meter
GB ISO DIN	BS	p	d1 max	plates b1 min	d2 max	pins L max	pins Lc max	h2 max	pt	t/T	Fu min	Fua	q ≈
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
05B-3	05B-3	8.00	5.00	3.00	2.31	19.9	23.0	7.11	5.64	0.80	11.1	13.1	0.54
*06B-3	*06B-3	9.525	6.35	5.72	3.28	34.0	37.3	8.26	10.24	1.30	24.9	28.6	1.18
08B-3	08B-3	12.70	8.51	7.75	4.45	44.9	48.8	11.81	13.92	1.60	44.5	54.9	2.00
10B-3	10B-3	15.875	10.16	9.65	5.08	52.8	56.9	14.73	16.59	1.70	66.7	80.3	2.80
12B-3	12B-3	19.05	12.07	11.68	5.72	61.7	66.3	16.13	19.46	1.85	86.7	96.7	3.80
16B-3	16B-3	25.40	15.88	17.02	8.28	99.9	105.3	21.08	31.88	4.15/3.1	160.0	193.0	8.00
20B-3	20B-3	31.75	19.05	19.56	10.19	116.1	122.2	26.42	36.45	4.5/3.5	250.0	275.0	11.00
24B-3	24B-3	38.10	25.40	25.40	14.63	150.2	156.8	33.40	48.36	6.0/4.8	425.0	468.0	21.00
28B-3	28B-3	44.45	27.94	30.99	15.90	184.3	191.7	37.08	59.56	7.5/6.0	530.0	579.0	25.00
32B-3	32B-3	50.80	29.21	30.99	17.81	184.5	191.5	42.29	58.55	7.0/6.0	670.0	732.0	32.00
40B-3	40B-3	63.50	39.37	38.10	22.89	227.2	237.4	52.96	72.29	8.5/8.0	950.0	1038.0	48.00
48B-3	48B-3	76.20	48.26	45.72	29.24	281.6	292.1	63.88	91.21	12.0/10.0	1500.0	1624.0	75.00

*直链板 Straight side plates