


链号 Chain No.	节距 Pitch	滚子直径 Roller dimensions				销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension			每米质量 Mass per meter
		d1 max	d8 max	b1 min	b8 max		L max	Lc max	h2 max	T	t max	
JB	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/m
BS25-C206B	19.05	11.91	18.30	4.00	8.00	3.28	24.00	25.60	8.26	1.30	1.50	0.25
BS25-C208A	25.40	15.88	24.60	5.70	10.30	3.96	31.00	32.80	12.07	1.50	1.50	0.79
BS25-C210A	31.75	19.05	30.60	7.10	13.00	5.08	39.50	41.20	15.09	2.03	2.03	1.36
BS25-C212A	38.10	23.23	36.60	8.50	15.50	5.94	48.80	51.50	18.08	3.25	3.25	2.19
BS25-C216A	50.80	28.58	49.00	11.00	21.50	7.92	66.20	70.00	24.13	4.00	5.00	4.06
BS30-C206B	19.05	9.00	18.30	4.50	9.10	3.28	26.30	29.60	7.28	1.30	1.50	0.50
BS30-C208A	25.40	11.91	24.60	6.10	12.50	3.96	35.60	39.50	9.60	1.50	2.00	0.83
BS30-C210A	31.75	14.80	30.60	7.50	15.00	5.08	43.00	47.10	12.20	2.00	2.40	1.27
BS30-C212A	38.10	18.00	37.00	9.75	20.00	5.94	58.10	62.70	15.00	3.00	4.00	2.14
BS30-C216A	50.80	23.23	49.00	12.00	25.20	7.92	71.90	77.30	18.60	4.00	5.00	3.55

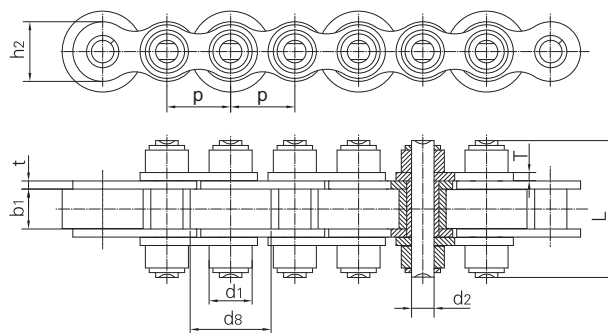

链号 Chain No.	节距 Pitch	滚子直径 Roller dimension		销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimension		抗拉强度 Ultimate tensile strength	每米重量 Mass per meter
		d1 max	d8 max			H2 max	T		
Dongfeng	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
08BS	12.70	8.51	16.00	4.45	27.20	10.60	1.60	17.80	0.25
12BS	19.05	12.07	28.00	5.72	45.40	16.00	1.85	28.90	0.79
12BS-P26	19.05	12.07	26.00	5.72	43.00	16.00	1.85	28.90	1.36