



链号 Chain No.		节距 Pitch	套筒 外径 Bush outer diameter	内节内宽 Width between inner	销轴 直径 Pin diameter	销轴 长度 Pins length	链板 高度 Plates depth	链板 厚度 Plate thickness	抗拉 强度 Ultimate tensile strength	每米 重量 Mass per meter	
JB	ANSI	Dongfeng	p	d1 max	plates b1 min	d2 max	L max	h2 max	T	Fu min	q ≈
		mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
S102B	S102B	101.60	25.40	51.30	15.95	111.30	39.60	9.70	160.0	10.40	
S110	S110	152.40	32.50	51.30	15.95	111.30	39.60	9.70	160.0	9.80	
S111	S111	120.90	36.60	63.20	19.13	131.20	52.30	9.70	214.0	15.90	
S131	S131	78.11	32.50	31.70	15.95	90.50	39.60	9.70	160.0	11.60	
S150	S150	153.67	44.70	80.00	25.48	164.60	66.60	12.70	378.0	25.70	
S188	S188	66.27	22.40	25.60	12.78	68.60	30.00	6.40	102.0	5.60	

工程用钢制套筒链附件


Steel bushed rollerless chain attachments

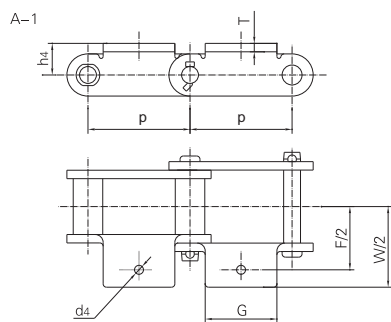

JB ANSI 链号 Chain No.	p	G	F	h4	W	d4	T
	mm	mm	mm	mm	mm	mm	mm
S 102B	101.60	77.00	121.00	25.40	180.80	10.50	9.70
S 131	78.11	73.90	104.60	25.40	157.00	13.00	9.70
S 188	66.27	54.60	95.20	20.60	131.60	8.40	6.40

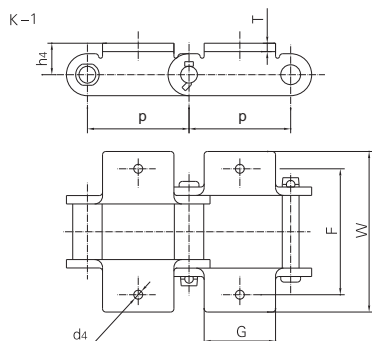


JB ANSI 链号 Chain No.	p	G	F	h4	W	d4	T
	mm	mm	mm	mm	mm	mm	mm
S 131	78.11	73.90	104.60	25.4	157.00	13.00	9.70
S 188	66.27	54.60	95.20	20.60	131.60	8.40	6.40

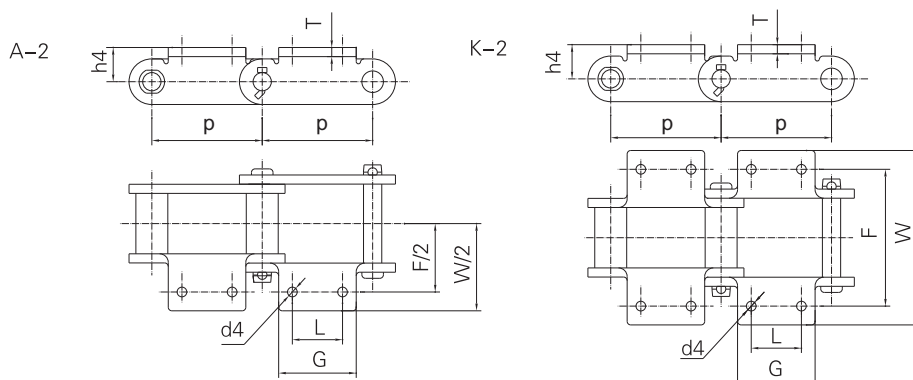


JB ANSI 链号 Chain No.	p	L	G max	F	h ₄	W max	d ₄	T
	mm	mm	mm	mm	mm	mm	mm	mm
S 102B	101.60	44.50	77.00	134.60	25.40	180.80	10.50	9.70
S 110	152.40	44.50	89.70	134.60	25.40	180.80	10.50	9.70
S 111	120.90	58.70	92.70	159.00	38.10	210.80	13.00	9.70
S 131	78.11	38.10	73.90	104.60	25.40	157.00	13.00	9.70
S 150	153.67	69.90	108.70	190.60	47.80	249.40	13.00	12.70
S 188	66.27	31.80	54.60	106.60	22.60	131.60	8.40	6.40

A-22



JB ANSI 链号 Chain No.	p	G	F	W	d ₄	T
	mm	mm	mm	mm	mm	mm
S188	66.27	49.20	45.20	61.20	10.20	10.40



JB ANSI 链号 Chain No.	p	L	G	F ₁	F ₂	h ₄	W	d ₄	T
	mm	mm	mm	mm	mm	mm	mm	mm	mm
S150	153.67	69.90	109.50	190.50	292.10	47.80	347.50	13.50	12.70