



油田链条

Oil field chains

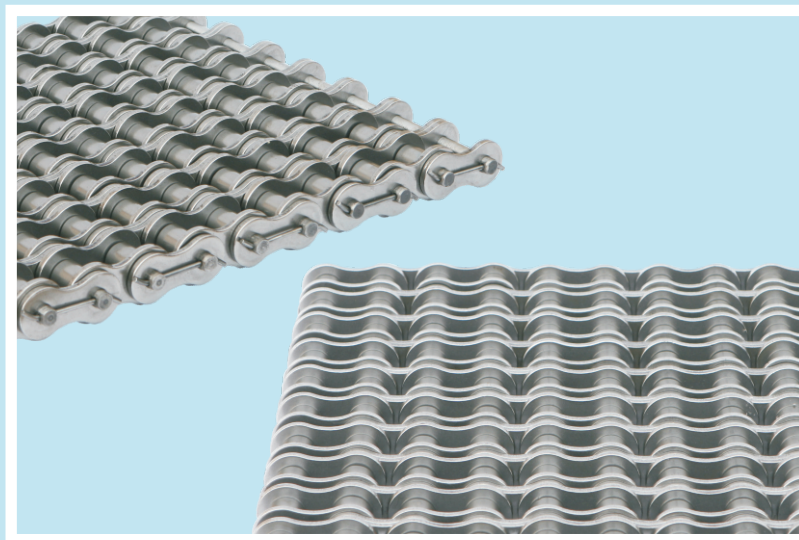

单排、双排、三排和多排
Simplex,
Doubling, Triplex and Multiplex

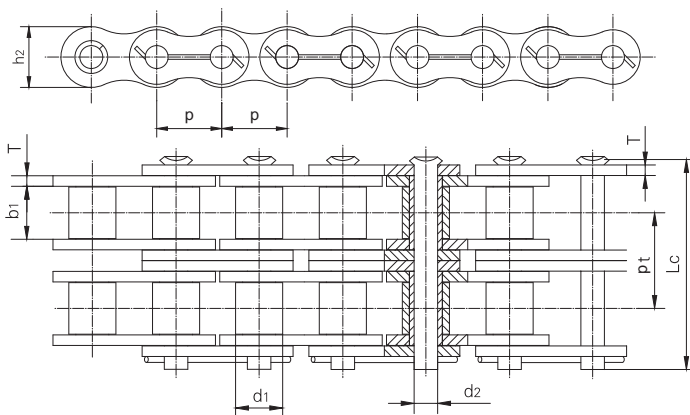

链号 Chain No.	节距 Pitch	滚子 直径 Roller diameter	内节 内宽 Width between inner	销轴 直径 Pin diameter	连接销 轴长度 Width over connecting	内链板 高度 Inner plates depth	链板 厚度 Plate thickness	排距 Transverse pitch	抗拉 强度 Ultimate tensile strength	动载 载荷 Dynamic strength	每米 重量 Mass per meter	
ANSI SY	Dong feng	p	d1 max	plates b1 min	d2 max	pins Lc max	h2 max	T	pt	Fu min	Fud min	q ≈
		mm	mm	mm	mm	mm	mm	mm	mm	kN	N/lb	kg/m
80	S16A-1	25.40	15.88	15.75	7.94	38.9	24.13	3.18	—	55.60	12055/1206	2.60
100	S20A-1	31.75	19.05	18.90	9.54	47.2	30.17	3.96	—	86.84	18460/1846	3.91
120	S24A-1	38.10	22.23	25.22	11.11	57.4	36.20	4.75	—	125.10	25978/2598	5.62
140	S28A-1	44.45	25.40	25.22	12.71	62.3	42.23	5.56	—	170.27	44340/3434	7.50
160	S32A-1	50.80	28.58	31.55	14.29	73.4	48.26	6.35	—	222.40	43771/4377	10.10
180	S36A-1	57.15	35.71	35.48	17.46	83.0	54.30	7.14	—	281.57	53823/5382	13.45
200	S40A-1	63.50	39.68	37.85	19.85	90.5	60.33	7.92	—	347.41	64499/6450	16.15
80-2	S16A-2	25.40	15.88	15.75	7.94	68.1	24.13	3.18	29.29	111.20	—	5.15
100-2	S20A-2	31.75	19.05	18.90	9.54	83.1	30.17	3.96	35.76	173.68	—	7.80
120-2	S24A-2	38.10	22.23	25.22	11.11	102.9	36.20	4.75	45.44	250.20	—	11.70
140-2	S28A-2	44.45	25.40	25.22	12.71	111.0	42.23	5.56	48.87	340.54	—	15.14
160-2	S32A-2	50.80	28.58	31.55	14.29	132.1	48.26	6.35	58.55	444.80	—	20.14
180-2	S36A-2	57.15	35.71	35.48	17.46	149.1	54.30	7.14	65.84	563.14	—	29.22
200-2	S40A-2	63.50	39.68	37.85	19.85	162.1	60.33	7.92	71.55	694.82	—	32.24
80-3	S16A-3	25.40	15.88	15.75	7.94	97.3	24.13	3.18	29.29	166.80	—	7.89
100-3	S20A-3	31.75	19.05	18.90	9.54	119.1	30.17	3.96	35.76	260.52	—	11.77
120-3	S24A-3	38.10	22.23	25.22	11.11	148.3	36.20	4.75	45.44	375.30	—	17.53
140-3	S28A-3	44.45	25.40	25.22	12.71	159.8	42.23	5.56	48.87	510.81	—	22.20
160-3	S32A-3	50.80	28.58	31.55	14.29	190.8	48.26	6.35	58.55	667.20	—	30.02
80-4	S16A-4	25.40	15.88	15.75	7.94	126.8	24.13	3.18	29.29	222.40	—	10.24
100-4	S20A-4	31.75	19.05	18.90	9.54	154.5	30.17	3.96	35.76	347.36	—	15.39
120-4	S24A-4	38.10	22.23	25.22	11.11	193.7	36.20	4.75	45.44	500.40	—	22.19
140-4	S28A-4	44.45	25.40	25.22	12.71	208.9	42.23	5.56	48.87	681.08	—	29.63
160-4	S32A-4	50.80	28.58	31.55	14.29	249.1	48.26	6.35	58.55	889.60	—	39.94
80-6	S16A-6	25.40	15.88	15.75	7.94	185.4	24.13	3.18	29.29	333.60	—	15.34
100-6	S20A-6	31.75	19.05	18.90	9.54	226.0	30.17	3.96	35.76	521.04	—	23.05
120-6	S24A-6	38.10	22.23	25.22	11.11	284.6	36.20	4.75	45.44	750.60	—	33.24
140-6	S28A-6	44.45	25.40	25.22	12.71	30.7	42.23	5.56	48.87	1021.62	—	44.38
160-6	S32A-6	50.80	28.58	31.55	14.29	366.2	48.26	6.35	58.55	1334.40	—	59.83
80-8	S16A-8	25.40	15.88	15.75	7.94	243.9	24.13	3.18	29.29	444.80	—	20.44
100-8	S20A-8	31.75	19.05	18.90	9.54	297.5	30.17	3.96	35.76	694.72	—	30.71
120-8	S24A-8	38.10	22.23	25.22	11.11	375.5	36.20	4.75	45.44	1000.80	—	44.28
140-8	S28A-8	44.45	25.40	25.22	12.71	404.4	42.23	5.56	48.87	1362.16	—	58.79
160-8	S32A-8	50.80	28.58	31.55	14.29	483.3	48.26	6.35	58.55	1779.20	—	79.86