



A 型
A Type

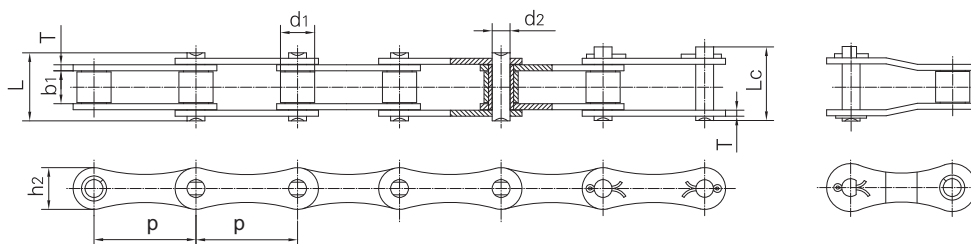

| 链号 Chain No. | 节距 Pitch | 滚子 直径 Roller diameter | 内节内宽 Width between inner plates | 销轴 直径 Pin diameter | 销轴 长度 Pins length | | 内链板 高度 Inner plates depth | 链板 厚度 Plate thickness | 抗拉强度 Ultimate tensile strength | 每米 重量 Mass per meter |
|-----------------|-------------|-----------------------------|------------------------------------|--------------------------|-------------------------|-----------|---------------------------------|-----------------------------|-----------------------------------|----------------------------|
| Dongfeng | p | d1 max | b1 min | d2 max | L max | Lc max | h2 max | T | Fu min | q ≈ |
| | mm | mm | mm | mm | mm | mm | mm | mm | kN | kg/m |
| A550 | 41.40 | 16.87 | 19.81 | 7.19 | 35.00 | 38.00 | 19.30 | 2.80 | 39.10 | 1.79 |
| A555 | 41.40 | 16.87 | 12.70 | 7.19 | 29.10 | 32.00 | 19.30 | 3.10 | 39.10 | 1.60 |
| A557 | 41.40 | 17.78 | 20.24 | 8.00 | 37.40 | 40.60 | 23.10 | 3.10 | 65.61 | 2.45 |
| A620 | 42.01 | 17.91 | 24.51 | 7.19 | 41.80 | 45.20 | 20.20 | 3.25 | 39.10 | 2.18 |

CA 型
CA Type

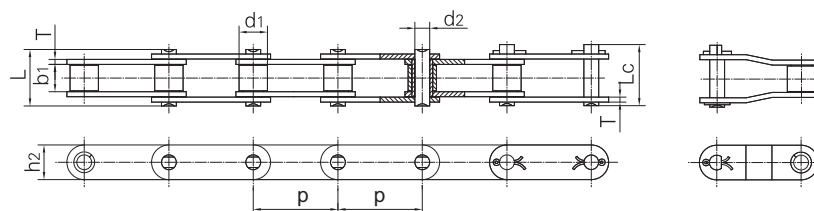

| 链号 Chain No. | 节距 Pitch | 滚子 直径 Roller diameter | 内节内宽 Width between inner plates | 销轴 直径 Pin diameter | 销轴 长度 Pins length | | 内链板 高度 Inner plates depth | 链板 厚度 Plate thickness | 抗拉强度 Ultimate tensile strength | 每米 重量 Mass per meter |
|-----------------|-------------|-----------------------------|------------------------------------|--------------------------|-------------------------|-----------|---------------------------------|-----------------------------|-----------------------------------|----------------------------|
| Dongfeng | p | d1 max | b1 min | d2 max | L max | Lc max | h2 max | T | Fu min | q ≈ |
| | mm | mm | mm | mm | mm | mm | mm | mm | kN | kg/m |
| CA550 | 41.40 | 16.87 | 19.81 | 7.19 | 35.00 | 38.00 | 19.30 | 2.80 | 39.10 | 1.94 |
| CA550V | 41.40 | 16.80 | 19.05 | 8.28 | 36.10 | 39.10 | 22.00 | 3.00 | 55.00 | 2.24 |
| CA555 | 41.40 | 16.87 | 12.70 | 7.19 | 29.10 | 32.00 | 19.30 | 3.10 | 39.10 | 1.72 |
| CA557 | 41.40 | 17.78 | 20.24 | 8.00 | 37.40 | 40.60 | 23.10 | 3.10 | 55.61 | 2.60 |
| CA620 | 42.01 | 17.91 | 24.51 | 7.19 | 41.80 | 45.20 | 20.20 | 3.25 | 39.10 | 2.35 |
| CA2060H | 38.10 | 11.91 | 12.70 | 5.94 | 29.20 | 31.60 | 18.00 | 3.25 | 31.10 | 1.45 |
| CA2063H | 38.10 | 11.89 | 12.70 | 5.94 | 29.40 | 34.20 | 19.30 | 3.25 | 31.28 | 1.65 |
| CAE44151 | 28.575 | 15.88 | 16.20 | 7.92 | 33.50 | 36.00 | 22.20 | 3.25 | 58.80 | 2.73 |
| 38.4R | 38.40 | 15.88 | 19.05 | 6.92 | 33.80 | 36.40 | 17.30 | 2.50 | 33.00 | 1.70 |
| 38.4V | 38.40 | 15.88 | 18.00 | 6.92 | 35.00 | 38.00 | 17.30 | 3.00 | 40.00 | 1.83 |
| 38.4VB | 38.40 | 15.88 | 10.05 | 8.28 | 36.10 | 39.40 | 20.50 | 3.00 | 50.00 | 2.17 |
| 55VD | 41.40 | 17.90 | 23.00 | 8.22 | 39.30 | 42.40 | 20.00 | 2.80 | 42.00 | 2.34 |