


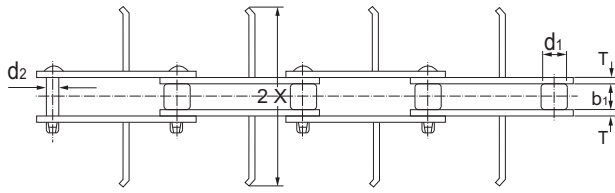




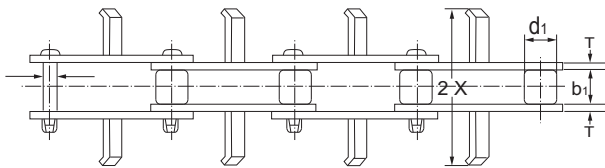



链号 Chain No.	节距 Pitch	外节内宽 Width between outer plates	销轴直径 Pin diameter	链板高度 plates depth	链板厚度 Plate thickness		刮板尺寸 Scraper dimension				抗拉强度 Ultimate tensile strength	型式 Type
					内链板 Inner plates	外链板 Outer plates	L ₁	L ₂	h ₂	α		
Dongfeng	p	b ₂ min	d ₂ max	h ₁ max	T ₁	T ₂	L ₁	L ₂	h ₂	α	Fu min	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	°	kN	
GS31F	152.4	32.5	22	45	25.4	10.0	106	280	65.5	75°	224.0	A
GS43F	152.4	34.0	22	45	28.0	12.0	115	400	80.5	90°	224.0	A
DS200	152.4	32.5	22	45	25.4	10.0	—	160	—	75°	224.0	B
DS250	152.4	32.5	22	45	25.4	10.0	106	210	65.5	75°	224.0	C
DS310	152.4	32.5	22	45	25.4	10.0	106	270	65.5	75°	224.0	C
DS450	200.0	41.0	35	80	35.0	14.0	150	400	121.3	75°	600.0	C
DS250A	152.4	32.5	22	45	25.4	10.0	—	210	—	75°	224.0	D
DS310A	152.4	32.5	22	45	25.4	10.0	—	270	—	75°	224.0	D






L 型附件
L Attachment

B 型附件
B Attachment

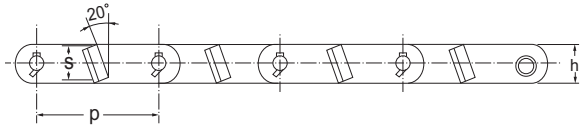


KL 型附件
KL Attachment

U 型附件
U Attachment

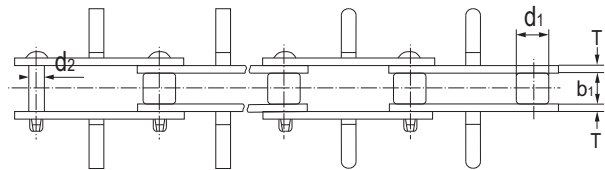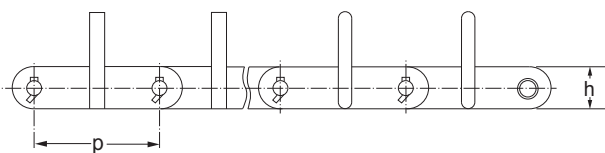

W 型附件
W Attachment

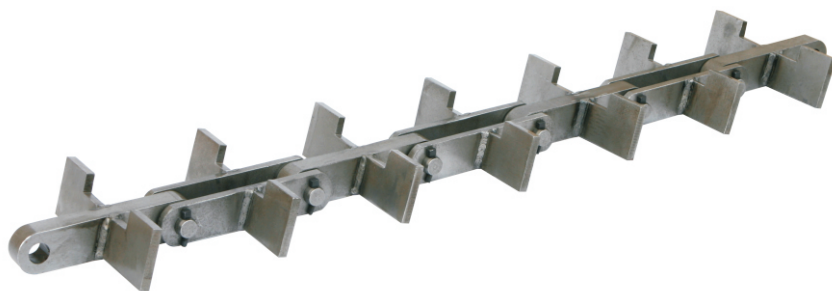

链号 Chain No.	节距 Pitch	滚子 直径 Roller diameter	内节 内宽 Width between inner plates	销轴 直径 Pin diameter	链板 高度 plates depth	链板 厚度 Plate thickness		抗拉 强度 Ultimate tensile strength
Dongfeng	p	d1 max	b1 min	d2 max	h max	T	2x	Fu min
	mm	mm	mm	mm	mm	mm	mm	kN
DSR50.8	50.8	15.88	15.88	7.92	23.5	4.0	140.0	55.6
DSR63.5	63.5	19.05	19.05	9.52	30.0	5.0	180.0	86.7
DSR80	80.0	25.40	25.40	12.70	36.0	6.0	230.0	80.0
DSR100	100.0	28.58	32.88	14.27	48.0	6.0	301.0	112.0
DSR125	125.0	38.10	30.00	14.50	38.1	6.3	185.0	113.0
DSR152.4	152.4	37.10	38.10	15.90	44.5	7.9	250.0	186.0
DSR200A	200.0	44.45	51.40	19.05	50.8	9.5	330.0	245.0
DSR200B	200.0	50.80	57.20	22.20	63.5	9.5	390.0	314.0
DSR300	300.0	57.20	66.70	25.40	76.2	12.7	560.0	476.0

链号 Chain No.	附件尺寸 Attachment dimension											
	L型附件 L Attachment		KL型附件 KL Attachment		B型附件 B Attachment		U型附件 Uattachment			W型附件 Wattachment		
Dongfeng	s	kg/m	s	kg/m	s	kg/m	s	c	kg/m	s	c	kg/m
DSR50.8	24	3.4										
DSR63.5	30	5.7										
DSR80	36	7.3					145	60	12.8			
DSR100	48	10.2										
DSR125	34	8.1	34	8.1	80	8.9	115	85	10.3			
DSR152.4	40	12.0	40	12.0	100	12.4				97	104	14.2
DSR200A	46	17.0	46	17.0	125	17.5						
DSR200B	58	28.0	58	28.0	150	25.0						
DSR300	70	34.0	70	34.0	200	36.2	290	160	50.5			