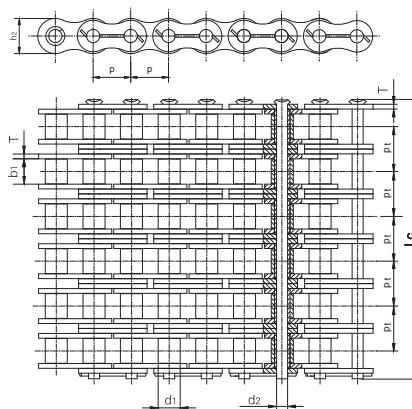


单排、双排、三排和多排  
 Simplex, Doubling  
 Triplex and Multiplex


链号 Chain No.		节距 Pitch	滚子 直径 Roller diameter	内节 内宽 Width between inner	销轴 直径 Pin diameter	连接销 轴长度 Width over connecting	内链板 高度 Inner plates depth	链板 厚度 Plate thickness	排距 Transverse pitch	抗拉 强度 Ultimate tensile strength	每米 重量 Mass per meter
ANSI SY	Dongfeng	p	d <sub>1</sub> max	plates b <sub>1</sub> min	d <sub>2</sub> max	pins Lc max	h <sub>2</sub> max	T	pt	Fu min	q ≈
		mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
80H	S16AH-1	25.40	15.88	15.75	7.94	42.8	24.13	3.96	—	55.60	3.1
100H	S20AH-1	31.75	19.05	18.90	9.54	50.6	30.17	4.75	—	86.84	4.52
120H	S24AH-1	38.10	22.23	25.22	11.11	61.6	36.20	5.56	—	125.10	6.6
140H	S28AH-1	44.45	25.40	25.22	12.71	66.4	42.23	6.35	—	170.27	8.3
160H	S32AH-1	50.80	28.58	31.55	14.29	77.3	48.26	7.14	—	222.40	11.2
180H	S36AH-1	57.15	35.71	35.48	17.46	86.4	54.30	7.92	—	281.57	14.83
200H	S40AH-1	63.50	39.68	37.85	19.85	97.3	60.33	9.52	—	347.41	19.16
80H-2	S16AH-2	25.40	15.88	15.75	7.94	75.4	24.13	3.96	32.59	111.20	6.15
100H-2	S20AH-2	31.75	19.05	18.90	9.54	89.7	30.17	4.75	39.39	173.68	9.03
120H-2	S24AH-2	38.10	22.23	25.22	11.11	110.5	36.20	5.56	48.87	250.20	13.13
140H-2	S28AH-2	44.45	25.40	25.22	12.71	118.6	42.23	6.35	52.2	340.54	16.6
160H-2	S32AH-2	50.80	28.58	31.55	14.29	139.2	48.26	7.14	61.9	444.80	22.3
180H-2	S36AH-2	57.15	35.71	35.48	17.46	155.6	54.30	7.92	69.16	563.14	29.36
200H-2	S40AH-2	63.50	39.68	37.85	19.85	175.6	60.33	9.52	78.31	694.82	38.11
80H-3	S16AH-3	25.40	15.88	15.75	7.94	108.0	24.13	3.96	32.59	166.80	9.42
100H-3	S20AH-3	31.75	19.05	18.90	9.54	128.8	30.17	4.75	39.39	260.52	12.96
120H-3	S24AH-3	38.10	22.23	25.22	11.11	159.4	36.20	5.56	48.87	375.30	19.64
140H-3	S28AH-3	44.45	25.40	25.22	12.71	170.8	42.23	6.35	52.2	510.81	24.9
160H-3	S32AH-3	50.80	28.58	31.55	14.29	201.1	48.26	7.14	61.9	667.20	33.5
80H-4	S16AH-4	25.40	15.88	15.75	7.94	140.6	24.13	3.96	32.59	222.40	12.26
100H-4	S20AH-4	31.75	19.05	18.90	9.54	167.9	30.17	4.75	39.39	347.36	18.14
120H-4	S24AH-4	38.10	22.23	25.22	11.11	208.3	36.20	5.56	48.87	500.40	26.2
140H-4	S28AH-4	44.45	25.40	25.22	12.71	223.0	42.23	6.35	52.2	681.08	33.1
160H-4	S32AH-4	50.80	28.58	31.55	14.29	263.0	48.26	7.14	61.9	889.60	44.5
80H-6	S16AH-6	25.40	15.88	15.75	7.94	205.8	24.13	3.96	32.59	333.60	18.35
100H-6	S20AH-6	31.75	19.05	18.90	9.54	246.1	30.17	4.75	39.39	521.04	27.1
120H-6	S24AH-6	38.10	22.23	25.22	11.11	306.1	36.20	5.56	48.87	750.60	39.4
140H-6	S28AH-6	44.45	25.40	25.22	12.71	327.4	42.23	6.35	52.2	1021.62	49.5
160H-6	S32AH-6	50.80	28.58	31.55	14.29	386.8	48.26	7.14	61.9	1334.40	66.7
80H-8	S16AH-8	25.40	15.88	15.75	7.94	271.0	24.13	3.96	32.59	444.80	24.5
100H-8	S20AH-8	31.75	19.05	18.90	9.54	324.3	30.17	4.75	39.39	694.72	36.28
120H-8	S24AH-8	38.10	22.23	25.22	11.11	403.8	36.20	5.56	48.87	1000.80	52.4
140H-8	S28AH-8	44.45	25.40	25.22	12.71	431.8	42.23	6.35	52.2	1362.16	66.3
160H-8	S32AH-8	50.80	28.58	31.55	14.29	510.6	48.26	7.14	61.9	1779.20	88.9